

Aegis Power Solution

1PH60

VME Power Converter

(Rev A02, 06/08/10)




Specifications: (25°C, nominal line, 100% load unless otherwise specified).

<u>AC Input Voltage:</u>	Normal 95VAC to 250VAC, 47Hz to 63Hz. Transient 70VAC to 270VAC, 100 msec. Mil-Std-704F Normal and abnormal range. Mil-Std-1399 Section 300A/B Type I 60Hz.
<u>AC Input Line Current:</u>	6.35/6.88A @ 115VAC, 3.18/3.44A @ 220VAC.
<u>Input Power:</u>	723/783W @ 115VAC, 700/760W @ 220VAC , typical.
<u>Power Factor:</u>	0.99 typical 47-63Hz.
<u>Input Frequency:</u>	47-63Hz.
<u>Output Power:</u>	600/650W Max.
<u>Holdup Time:</u>	10 msec typical.
<u>Output Voltages:</u>	(-001) +28VDC, 23.2A, 300mVp-p (20MHz BW), 650W. (-002) +48VDC, 12.5A, 480mVp-p (20MHz BW), 600W. (-003) +12VDC, 50A, 200mVp-p (20MHz BW), 600W.
<u>Efficiency:</u>	83%/115VAC, 86%/220VAC typical. full load.
<u>Startup Time:</u>	500 millisecond Max.
<u>Voltage Setpoint, Line/Load Regulation:</u>	+/- 2.5% (any combination).
<u>Current Limit:</u>	Short Circuit protected, automatic recovery.
<u>Temperature Regulation:</u>	+/-0.01% / deg C.
<u>Size:</u>	6U x 160mm x 5hp (1"), see mechanical drawing.
<u>Weight:</u>	3.2 lb. Typical.
<u>Connector:</u>	Positronic, PCIM30W15M400A1.
<u>Vibration:</u>	MIL-STD-810F, Method 514.5, Procedure 1.
<u>Shock:</u>	MIL-STD-810F, Method 516.5, Procedure 1.
<u>Humidity:</u>	0-95% non-condensing.
<u>EMI:</u>	Mil-Std-461E, CE102, CS101.

1PH60 **115/220VAC 1phase, 47-63Hz 600/650W Power Card**

Power Derating for Temperature and Input Voltage per below Graph

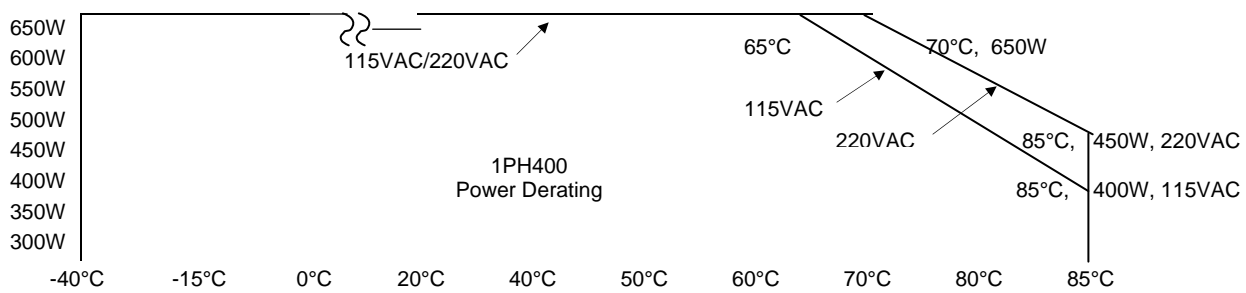

Baseplate Cooling temperature at Wedgelocks

Order Info:

- 1PH60-001 28VDC Out 650W.
- 1PH60-002 48VDC Out 600W.
- 1PH60-003 12VDC Out 600W.




REVISIONS		DATE	APPROVED
A01	INITIAL RELEASE	09/24/09	MVM
A02	REV A02 BASEPLATE	09/30/09	MVM
A03	MOVED WEDGE LOCATION	10/06/09	MVM

NOTES: UNLESS OTHERWISE SPECIFIED

- TYPE 1, 6U PLUG-IN UNIT - PRIMARY SIDE RETAINER. 1.00 INCH PITCH.
(FIGURE 10 OF VITA 48.2, 12/26/07)
- CONNECTOR POSITRONIC PCIM30W15M400A1
- PIN1-12 = 28AMP RATING, PIN13-27 = 3AMP RATING, PIN28,29 AND 30 = 40AMP RATING

- J1-1 - #1 RETURN
- J1-2 - #2 RETURN
- J1-3 - #1 RETURN
- J1-4 - #2 RETURN
- J1-5 - #1 RETURN
- J1-6 - #2 RETURN
- J1-7 - #1 +DUT
- J1-8 - #2 +DUT
- J1-9 - #1 +DUT
- J1-10 - #2 +DUT
- J1-11 - #1 +DUT
- J1-12 - #2 +DUT
- J1-13 - NC
- J1-14 - NC
- J1-15 - #1 +SENSE
- J1-16 - NC
- J1-17 - NC
- J1-18 - #1 -SENSE
- J1-19 - NC
- J1-20 - NC
- J1-21 - SHARE+
- J1-22 - NC
- J1-23 - NC
- J1-24 - SHARE-
- J1-25 - NC
- J1-26 - #2 -SENSE
- J1-27 - #2 +SENSE
- J1-28 - CHASSIS
- J1-29 - NEUTRAL
- J1-30 - LINE

CAD MAINTAINED. CHANGES SHALL BE INCORPORATED BY THE DESIGN ACTIVITY.

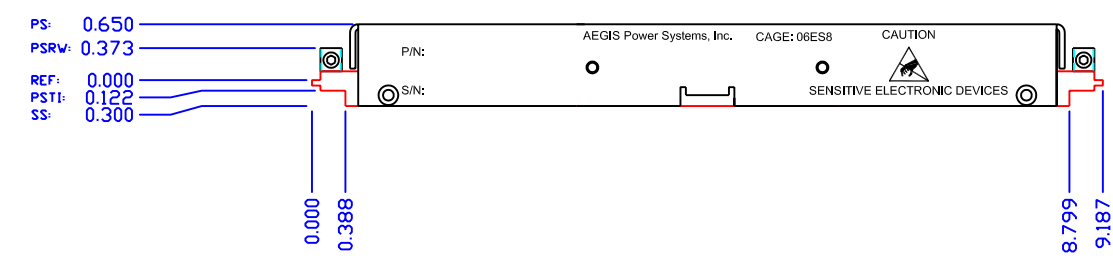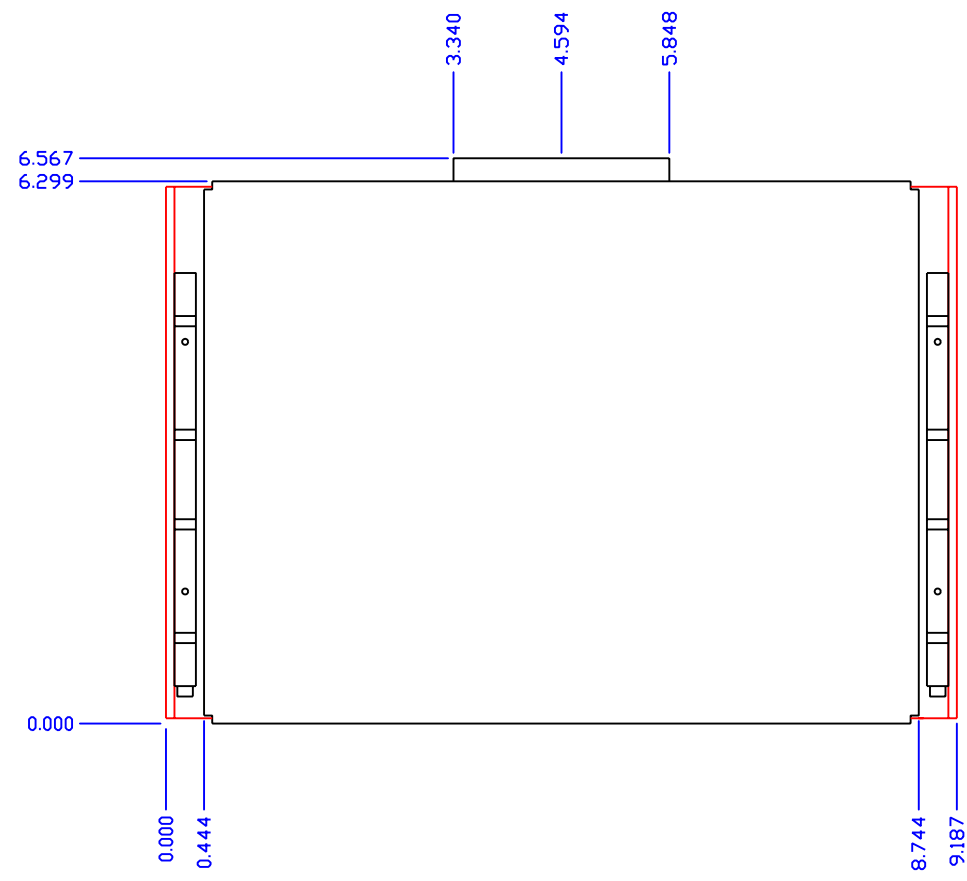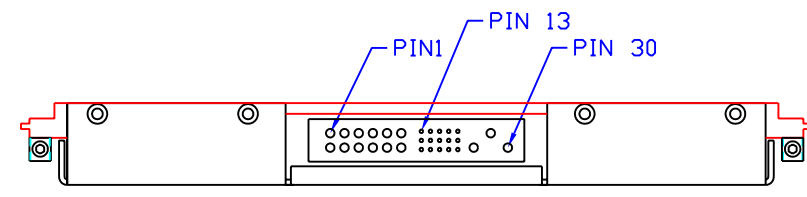

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS DEGREES
± N/A .XX ± .02 ± .5
.XXX ± .005

MATERIAL	SEE NOTE 2
FINISH	SEE NOTE 3
APPLICATION	DO NOT SCALE DRAWING

AEGIS POWER SYSTEMS, INC. PROPRIETARY INFORMATION. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART HEREOF MAY BE MADE EXCEPT BY EXPRESS WRITTEN PERMISSION OF AEGIS POWER SYSTEMS, INC.

CONTRACT NO.		AEGIS POWER SYSTEMS MURPHY, NORTH CAROLINA	
APPROVALS	DATE	TITLE	
DRAWN MVM	06/16/09	VME SINLE PHASE PFC 650W MECHANICAL LAYOUT AEGIS P/N: 1PH60	
CHECKED		SIZE	FSCM NO.
PROJ. ENG.		D	06ES8
MFG		DWG NO.	1PH60-M00
QUALITY		REV	A03
		SCALE	1/1
		SHEET 1 OF 1	